



## Product Parameters

0.75Kw Three loop electromagnetic valve  
Electric Powered Hydraulic Driven Pumps  
Easy to operate and widely use



|                    |          |                 |                  |
|--------------------|----------|-----------------|------------------|
| Model Number       | DB075-D3 | Rotate Speed    | 1400r/min        |
| High Pressure      | 70Mpa    | Capacity of Oil | 8L (7L Usable)   |
| High Pressure Flow | 0.9L/min | Type of Oil     | ISO VG #15 - #32 |
| Low Pressure       | 7MPa     | Net Weight      | 25kg             |
| Low Pressure Flow  | 5L/min   | Gross Weight    | 35kg             |
| Motor Power        | 750W     | Package         | Wooden case      |



## Application

**Three separate hydraulic tools can be connected at the same time**  
Separate hydraulic tools other than the picture below can also be connected to this three-circuit pump





## Product Detail

Aluminum chassis



Shock gauge



Hydraulic oil injection port

Interface



Oil-out







## 01 Shockproof pressure gauge


Effectively avoid the effects after vibration, Instrument indication is stable and clear.



## Copper interface

All copper, high hardness, No rust, long service life

## 02

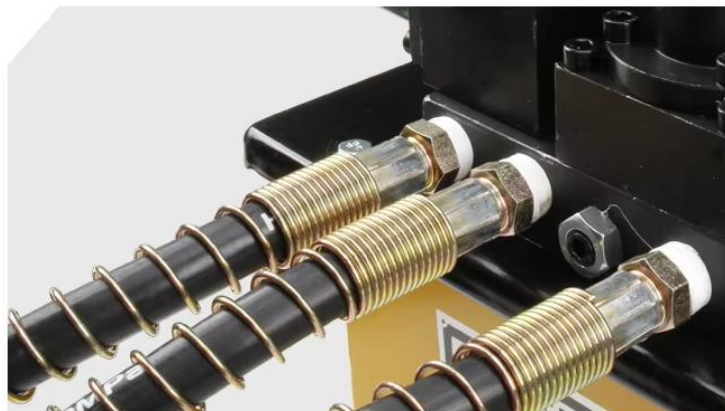

## 03 Manual Pressure relief valve

Manual valve control oil return oil, pull down in the pressure relief state, pull up in the pressure state



## Easy to use

The product is small, the pressure is strong, the structure is simple. Greatly improved the work efficiency.

## 04



## 05 Oil Filler

Hydraulic pump must add 15# to 46# anti-wear hydraulic oil to work normally, refueling must exceed the oil window.



## Hydraulic system oil level indicator

Thermometer, records the temperature of the working fluid in the tank.

## 06

