



Product Parameters

Hydraulic Cylinder FPY-301



Model	FPY-301	Stroke	14mm
Tonnage	30T	Closed Height	61mm
Inner diameter	75mm	Outer diameter	123mm



Product Detail



With two holes



NPT 3/8 Male Coupler




Barrier-free jacking






In order to operate correctly, all cylinders need to be connected to a solid lifting surface. Cylinder damage can result from the use of cylinders on sandy, earthen or loose surfaces.

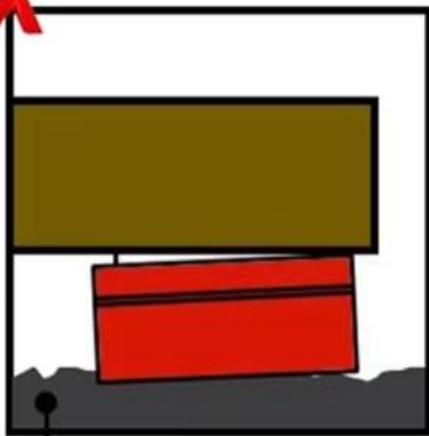

Rough Surface

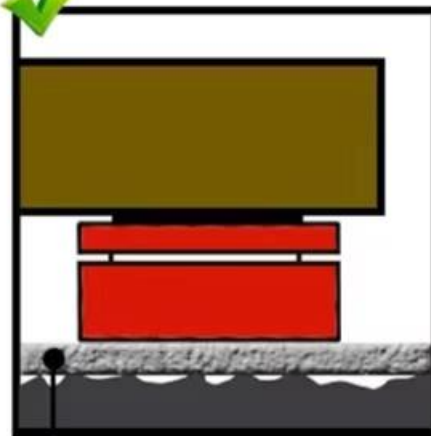

Flat Raised Surface

Suitable for a variety of environments

Commonly used in Electric Power , Chemical Industry,
Bridge Industry and so on.





Product Detail Presentation

Male connector + dust cap 1

Precise and convenient connection, effectively prevent dust



Smooth Surface 2

Clear circle mark, firmly fixed, not to explode cylinder.



working status 3

Working jacking, non-stick cylinder, full tonnage, full travel.



Requires hand pump or electric pump 4

This product does not come with a pump and needs to be purchased separately

