



Product Parameters




Model	Spread	Reach	Stroke	Top Degree	Thread diameter	Diameter	Weight
YLX-5T	200	140	50	22	45.6	φ59	6.5Kg
YLX-10T	250	160	60	23	60	φ75	10.5Kg
YLX-15T	300	180	60	24	60	φ75	12Kg
YLX-20T	350	195	70	24	73	φ88	16Kg
YLX-30T	400	210	70	24	88	φ102	25Kg
YLX-50T	500	200	60	24	110	φ109	33Kg




Application



Three claws and two claws are interchangeable

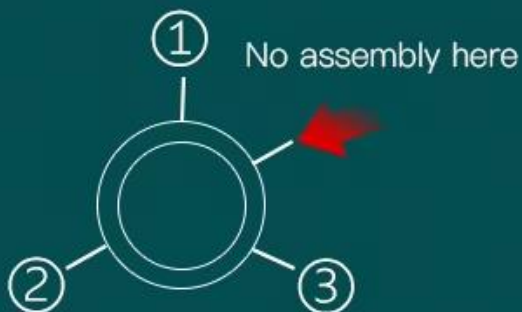

Drawing of three-claw assembly

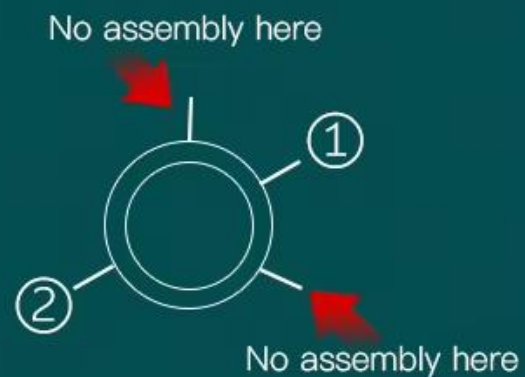

Drawing of two-claw assembly



Both horizontal and vertical can be used



◀ Vertical usability

Easy to operate without site restriction

Horizontal usability





Product Detail


Movable handle



Oil return switch



Rama Circle



Pump body+thimble

Alloy steel claw




**01 Thickening design of thimble**

Great improvement in wear resistance and durability

**Raw material forging solid pump body**

Integral forming forging without oil leakage and cracking

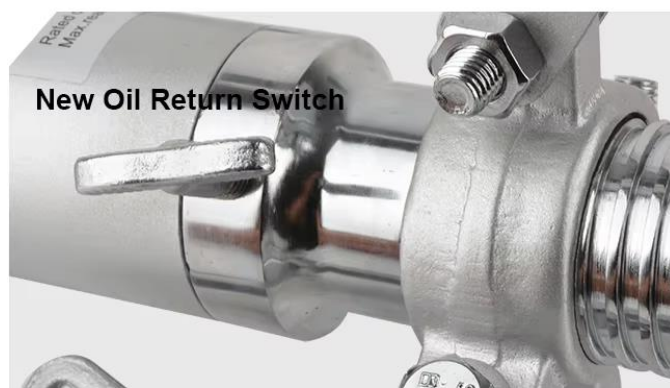02

New Oil Return Switch

03 Thickening plunger

Insert the handle into the top of the pump body and press it up and down.



Thickened rubber sleeve with soft and comfortable texture

Alloy steel claw

The claw hook and claw frame are forged with high strength alloy steel. They are strong, durable and non-deformable.

04