





HYDRAULIC PUMPS

**BARTON
TOOLS**

➤ Hand pump

- Max Working Pressure: 700 Bar;
- Carry handles for easy portability;
- Durable glass-filled nylon reservoir and nylon encapsulated aluminium pump base for maximum corrosion resistance;
- Professional choice for a wide range of industrial applications;
- Large oil capacities to power a wide range of cylinder or tools;
- Two-speed pumps provide fast pumping to meet the loading with the cylinder unloaded;
- Non-conductive fibreglass handle for operator safety;
- Internal pressure relief valve for overload protection.

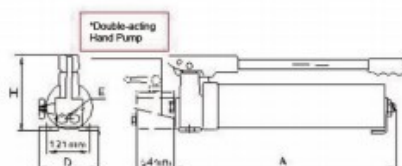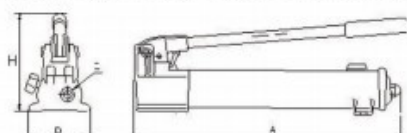

Art.No	Usable Oil (cm ³)	Pump Type	Pressure Rating (bar)		Oil capacity (cm ³)		Dimensions (mm)			Oil Port Thread (NPT)E	Weight (kg)
			1. Stage	2 nd Stage	1. Stage	2 nd Stage	A	H	D		
P-142	350	Single- acting	13.8	700	7.0	1.0	310	127	137	3/8	2.2
P-392	901		13.0	700	11.26	2.47	533	157	120	3/8	4.0
P-80	2200		25.0	700	16.22	2.46	545	170	148	3/8	10.9
P-801	4080		25.0	700	16.22	2.46	659	174	146	3/8	14.1
P-462	7423		25.0	700	16.22	2.46	650	308	280	3/8	26.2
P-462XL	10000		25.0	700	16.22	2.46	650	308	280	3/8	35.8
P-84	2200	Double- acting	25.0	700	16.22	2.46	545	170	148	3/8	10.9
P-841	4080		25.0	700	16.22	2.46	675	174	146	3/8	14.9
P-464	7423		25.0	700	16.22	2.46	650	308	280	3/8	26.2
P-464XL	10000		25.0	700	16.22	2.46	650	308	280	3/8	36.8