

HHW-25S

Manual Tube Bender

Manual tube pipe bender with multiple dies, lightweight design, precise bending, and wide application for various pipe types.

Characteristic:

Solid bench-mounted with extension handle, includes 7 bending shoes. ✓

Quick-change shoes; adjustable roller with thumb screw. ✓

Durable steel dies, nearly unbreakable. ✓

Heavy-duty plastic carry case with handle. ✓



Smooth bending without deformation. ✓

Supports U-bends, counter-bends, swan-neck, and connecting bends. ✓

High quality, precise, and easy to use. ✓



Model	Bending Range	Mold Sizes	Wall Thickness	Packing Size
HHW-25S	Ø10-25mm	3/8"(10mm), 1/2"(12mm), 9/16"(14mm), 5/8"(16mm), 3/4"(19mm), 7/8"(22mm), 1"(25mm)	0.8 - 2.0 mm	67x 19 x 42 cm

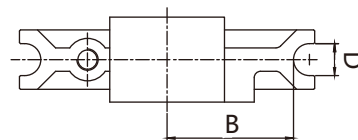

Bending Shoe Size (inch)	A (mm)	Minimum Bend Radius B (mm)	D (mm)	Wall Thickness of Standard Steel Pipe, Stainless Steel Pipe (mm)	Wall Thickness of Standard Copper Tubes (mm)
3/8"	100	42	11	0.8	1.0
1/2"	119	50.5	13	1.0	1.2
9/16"	139	55.5	15	1.0	1.2
5/8"	159	68.5	17	1.0	1.2
3/4"	179	77	20	1.0	1.2
7/8"	225	98.5	23	1.2	1.5
1"	225	97	26	2.0	1.6